




# Glas-Wrap™ Outerwrap

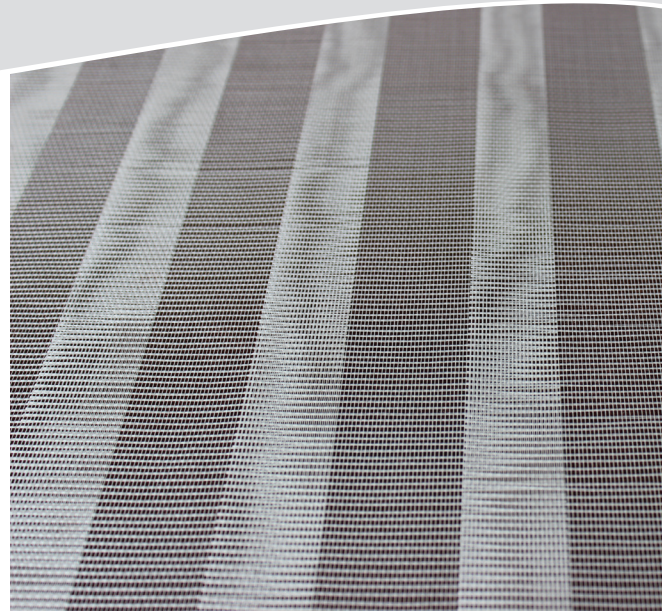

### Description:

Glas-Wrap™ outerwrap is a white, resin-coated, woven fiberglass fabric.

### End Use:

Used as an outerwrap for Trenton Wax-Tape® #1 anticorrosion wrap for additional protection against backfill and soil stress.

### Application Procedures:

Wearing gloves, apply Glas-Wrap™ outerwrap over the Wax-Tape® #1 wrap with a 1" overlap, rubbing firmly onto the Wax-Tape® wrap.

### Specifications:

Tensile strength	(per one inch width)
	85 lb min.
Thread count per inch:	
Wrap threads	20
Fill threads	10
Thickness	5 mils
Color	White

### Packaging:

- 4" x 150' rolls (18 per case)
- 6" x 150' rolls (12 per case)
- 12" x 150' rolls (6 per case)
- 100 sq. yds. per case, 13 lbs per case

### Quantity Requirements:

Pipe Size	Glas-Wrap™ Width	Sq. yds./100 ft. (1" overlap)
2"	4"	9
4"	4"	18
6"	4"	26
8"	4"	35
10"	6"	39
12"	6"	47
14"	6"	55
16"	6"	62
18"	6"	70
20"	6"	78
22"	6"	86
24"	6"	93
24"	12"	86



**Corporate Office:**  
7700 Jackson Road  
Ann Arbor, MI 48103 USA  
(734) 424-3600  
Fax: (734) 426-5882  
trenton@trentoncorp.com

**European Office:**  
8 rue d'Athènes  
75009 Paris  
France  
+33 (0) 1 70 62 94 74  
europe@trentoncorp.com

**[www.trentoncorp.com](http://www.trentoncorp.com)**

*Trenton Corporation is an ISO 9001 registered company*